


JD1-B快装法兰式精密过滤器

JD1-B Quickly Flange Cartridge Filter Housing

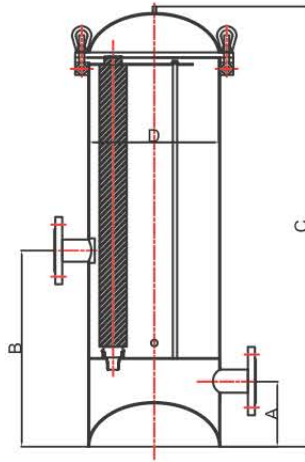

参数概述/General Specifications

- 1、材质SUS304, SUS316L;
- 2、最大工作压力150Psi;
- 3、快装法兰; 不带腿、平压、或带钢碗插件;
- 4、表面抛光处理或亚光处理。

- 1、Material:SUS304,SUS316L;
- 2、Max working pressure 150Psi;
- 3、Quickly Flange Type,Without legs, With SS cup or not;
- 4、Polished or sandblast external surface.

尺寸/Dimension

型号/Model	A (mm)	B (mm)	C (mm)	D (mm)	Inlet/Outlet	Drain
JD1-B-Φ170x3X10"	75	180	510	Φ170	1", 1 1/2"	1/4"
JD1-B-Φ170x3X20"	75	180	760	Φ170	1", 1 1/2"	1/4"
JD1-B-Φ170x 3X30"	75	350	1015	Φ170	1", 1 1/2"	1/4"
JD1-B-Φ170x 3X40"	75	350	1270	Φ170	1", 1 1/2"	1/4"
JD1-B-Φ200x 5X20"	75	180	780	Φ200	1" ; 2"	1/2"
JD1-B-Φ200x 5X30"	75	350	1035	Φ200	1" ; 2"	1/2"
JD1-B-Φ200x 5X40"	75	350	1290	Φ250	1" ; 2"	1/2"
JD1-B-Φ250x 7X20"	120	180	840	Φ250	1" ; 2"	1/2"
JD1-B-Φ250x 7X30"	120	350	1100	Φ250	1" , 2 1/2"	1/2"
JD1-B-Φ250x 7X40"	120	350	1350	Φ250	1" , 2 1/2"	1/2"
JD1-B-Φ300x 9X30"	150	350	1135	Φ300	1" , 2 1/2"	1/2"
JD1-B-Φ300x 9X40"	150	350	1390	Φ300	1" , 2 1/2"	1/2"
JD1-B-Φ350x 15X30"	150	350	1150	Φ350	1" , 2 1/2"	3/4"
JD1-B-Φ350x 15X40"	150	350	1405	Φ350	1" , 2 1/2"	3/4"